

# PowerTrac DT<sup>3</sup>

## CHARGING SOLUTION DIAGNOSTIC TOOL

### *Monitors and Logs Critical Battery Performance Data*

#### **Features**

- + Plug & play operation
- + Wireless data transfer with superior microprocessor controls
- + Easy installation
- + Compatible with a wide array of material handling electric equipment
- + Tracks battery performance
- + Select and size batteries properly
- + Non volatile memory (no data loss after disconnection)
- + One click reporting and charting
- + Monitor daily energy usage over a short period of time



The PowerTrac DT<sup>3</sup> is a high performance, wireless electronic diagnostics tool that monitors and logs material handling vehicle performance over a short period of time. The PowerTrac DT<sup>3</sup> allows users to select and size batteries for evaluating electric vehicle applications and equipment.

The PowerTrac DT<sup>3</sup> records the vehicles ampere-hours (Ahr) during the time the PowerTrac DT<sup>3</sup> is installed. The PowerTrac DT<sup>3</sup> can help you determine how many batteries you need, why batteries might not be lasting as long as they should and if opportunity or fast charging are a better fit for your facility. The PowerTrac DT<sup>3</sup> helps you determine the best battery/charging solution based on your power study data.

The new PowerTrac DT<sup>3</sup> is more compact, less invasive, and easier to install. The PowerTrac DT<sup>3</sup> is a plug-and-play device that is easy to install, which makes it quite easy to use with existing battery systems. PowerTrac DT<sup>3</sup> is a real-time data logging system that tracks battery activity during the short-time the unit is plugged into the battery. Once disconnected the data is stored in the non volatile memory for access at a later date.



The PowerTrac DT tracks and saves critical battery performance data including:

- + Instantaneous battery voltage, battery current, and temperature
- + Charge and discharge Amp-Hours since installation and per event
- + Charge and discharge events, including:
  - Event type (charge/discharge/open)
  - Event start time and duration
  - Minimum and maximum voltages with time stamps
  - Maximum current and temperature with time stamps
  - Event Amp-Hours of charge/discharge
  - Event end voltage (30 second average)
  - Over/under voltage, over current & over temperature alarms

### Typical reports and charts

- + "Daily" Ahrs Used and Replaced
- + Log of All Charge/Discharge Cycles
- + Battery Assessment
- + End of Charge/Discharge Voltage
- + Ahrs of Charge/Discharge
- + Maximum Charge/Discharge Temperature
- + Daily Energy Usage

### Example reports and charts

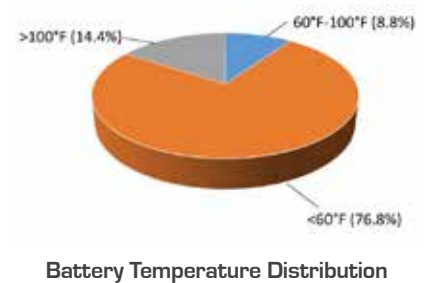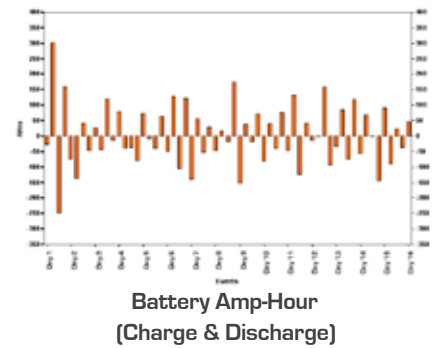

## PowerTrac DT3 Specifications

Models	PTDT3
Current Monitoring	Hall Effect Sensing
Nominal Battery Voltage	24V-84V
Operating Voltage	18V- 120V
Bi-Directional Current Measurement	+/- 500A typical 1A resolution
Voltage Accuracy	0.1V
Real Time Clock	Time keeping and stamping of data
Operating Temperature	-25°C to + 60°C (-13°F to +140°F)
Dimensions	4.25"L x 1.5"W x .6"H
Communication Interface	900Mhz Industrial Wireless
Data Storage	10,000 events
Data Collection	Upload data to PC via PowerTrac Link+
Wireless Range	Up to 150'
Packaging	Water and acid resistant
Power Consumption	1/2 Watt nominal
Protection	Internal fuse and external in-line fuse Reverse Polarity Protection

Your Complete Power  
Solution Provider



**Power Designers Sibex**  
4005 Felland Drive, Suite 116 • Madison, WI 53718 USA  
+1.608.231.0450 • sales@powerdesigners.com  
www.powerdesigners.com

Power Designers Sibex reserves the right to incorporate design and material changes without notice.  
Design features, materials of construction and dimensional data are provided for your information only and should not be relied upon unless confirmed from Power Designers Sibex.

ISSUED: 03/2018 PDS-PTDT3  
COPYRIGHT © 2018 Power Designers Sibex