



## OPPORTUNITY HF CHARGER

Total Charge Cycle Efficiency > 90%

Peak Efficiency > 93%

# REVOLUTION Opportunity Battery Chargers

## MODULAR HIGH FREQUENCY CHARGERS

### Unmatched energy savings

- ⌚ Highest charging efficiency throughout the entire charge cycle
- ⌚ Lowest energy costs related to battery charging
- ⌚ Latest generation MOSFET power conversion technology
- ⌚ CEC Compliant
- ⌚ Minimize or even avoid peak demand cost related to battery charging

### Innovative modular architecture

- ⌚ Multi-voltage 1.3kW power modules, that can be combined to produce over 30 kW output
- ⌚ "Plug and Play" utility makes expansion easy and inexpensive
- ⌚ No Downtime! Charger remains operational if a power module fails

### Cost effective with long term savings

- ⌚ Low initial cost versus traditional fast chargers
- ⌚ Charger can be programmed for all lead acid and lithium batteries
- ⌚ Wireless Communication
- ⌚ With these unique design features, the Revolution eliminates the need to replace chargers as your lift truck/battery fleet changes in the future



The REVOLUTION Series is an innovative line of ultra-high frequency battery chargers that incorporates cutting edge modular power design that delivers efficiencies greater than 90% throughout the entire charge cycle. As the charge cycle progresses and the output current tapers down, the charger will turn off unneeded modules, allowing the remaining modules to operate at peak efficiency.

The REVOLUTION Series is a combination of cutting edge charging and energy management technologies, with a smaller footprint, lower acquisition costs, easy maintenance, and flexible configurations, which makes updating your fleet of electric lift trucks a more attractive investment than ever before. Free your operation from spare batteries, daily battery changes, battery storage areas, and energy inefficient charging!

# REVOLUTION

## Variable Configuration Architecture


The REVOLUTION series of chargers are modular concept chargers offering multiple configuration capability. The independent power modules, installed in parallel, allow the user to add individual modules, increasing the charger's output for a minimal upgrade cost.

The parallel module design provides built-in redundancy that ensures that in the event of a module failure the charger will continue to operate, at a slightly lower current output, until the problematic module is replaced. In the event of a module failure, the module can quickly be replaced. The charger display will indicate the module failure and with the removal of a few screws, the faulted module can simply be unplugged and a new module plugged in, replace the door, re-energize the charger, and it is back to work. The unique modular architecture provides unmatched value, as diagnosis and repair of a REVOLUTION is the simplest and fastest of any charger in service today.

The REVOLUTION charger, when combined with the PowerTrac data logger, has the ability to be multi-voltage [24/36/48]\*, allowing the charger to automatically charge a wide range of batteries and amp hour capacities, making the REVOLUTION the last charger you will need to purchase.

## REVOLUTION Series Features

- 🌀 Modular architecture that is scalable and reliable
- 🌀 Small footprint and light weight with wall, post, or rack mounting options
- 🌀 PowerTrac battery data logger option allows the REVOLUTION charger to have multi-voltage [24/36/48]\* capabilities, giving the charger the ability to automatically adapt to the battery voltage and AH capacity
- 🌀 PowerCharge.NET monitoring system option allows you to collect and analyze fleet utilization information from a single location, optimizing your cost savings
- 🌀 The most efficient charger throughout the entire charge cycle

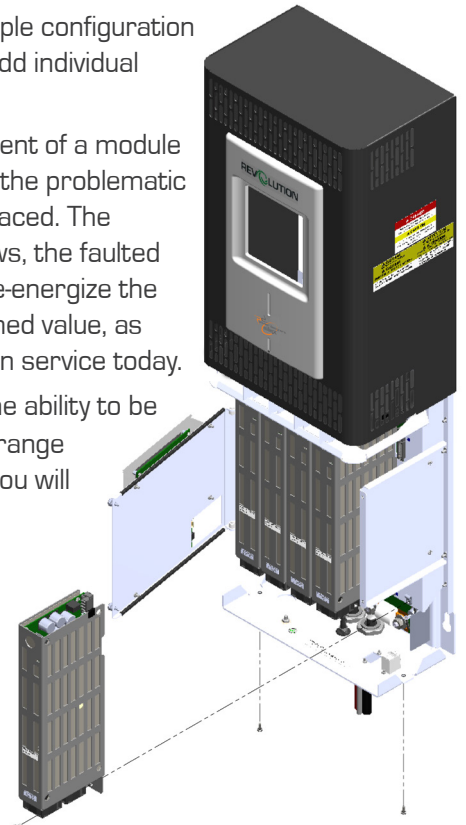

\*48V chargers are capable of charging 24/36/48 batteries  
36V chargers are capable of charging 24/36 batteries

## REVOLUTION Opportunity Charger Specifications

Model	Module Size	Output Voltage	4kW	5kW	6kW	8kW	9kW	10kW	12kW	13kW	14kW	15kW
Maximum Current Output 5X	36	36V	90	120	150							
	48	36V/48V	75/67	100/90	125/112							
8X	36	36V			150	180	210	240				
	48	36V/48V			125/112	150/135	175/157	200/180				
12X	36	36V						240	270	300	330	350
	48	36V/48V						200/180	225/202	250/225	275/247	300/270
<b>Number of Modules</b>			3	4	5	6	7	8	9	10	11	12
<b>Charger kW Rating</b>			3.9	5.2	6.5	7.8	9.1	10.4	11.7	13.0	14.3	15.6
<b>Input Current Draw</b>			5.5	7.4	9.2	11.1	12.9	14.8	16.6	18.5	20.3	22.2
<b>AC Breaker</b>			5X: 15A			8X: 20A		12X: 30A				
<b>Max. Input Current Draw</b>			5X: 10A			8X: 15A		12X: 22A				
<b>Input Voltage</b>			480VAC, 3-phase ± 10%									
<b>Efficiency</b>			Total charge cycle efficiency > 90% Peak charging efficiency > 93%									
<b>User Interface</b>			LCD/Keypad, Ethernet (optional)									
<b>Cooling</b>			Forced air (fans)									
<b>Dimensions (WxDxH)</b>			5X: 12.5" x 8.5" x 20.25"			8X: 18.5" x 9.5" x 21"		12X: 26.5" x 9.5" x 21"				
<b>Weight</b>			5X: ≤ 56 lbs			8X: ≤ 81 lbs		12X: ≤ 120 lbs				
<b>Certifications</b>			UL and cUL listed; CEC Compliant									

Based on 25% start rate

# Your Complete Power Solution Provider



**Power Designers Sibex**  
430 North Suncoast Blvd. • Crystal River, FL 34429 USA  
+1.352.795.0101 • sales@powerdesigners.com  
www.powerdesigners.com

Power Designers Sibex reserves the right to incorporate design and material changes without notice. Design features, materials of construction and dimensional data are provided for your information only and should not be relied upon unless confirmed from Power Designers Sibex.

ISSUED: 08/2017 PD-REV-P  
COPYRIGHT © 2017 Power Designers USA LLC